

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 10 TWN. 14_N RNG. 5_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 4-15-09
Party Chief: Greene
Crew: Taylor / Finney
Type of Marker: Mag nail found w/ photo mark
Method of Establishment: County: 1-13-95
IN S.P.C. E Zone, NAD 83
Name: 14051003
N: 492 302.137 3 (m)
E: 75 526.246 9 (m)

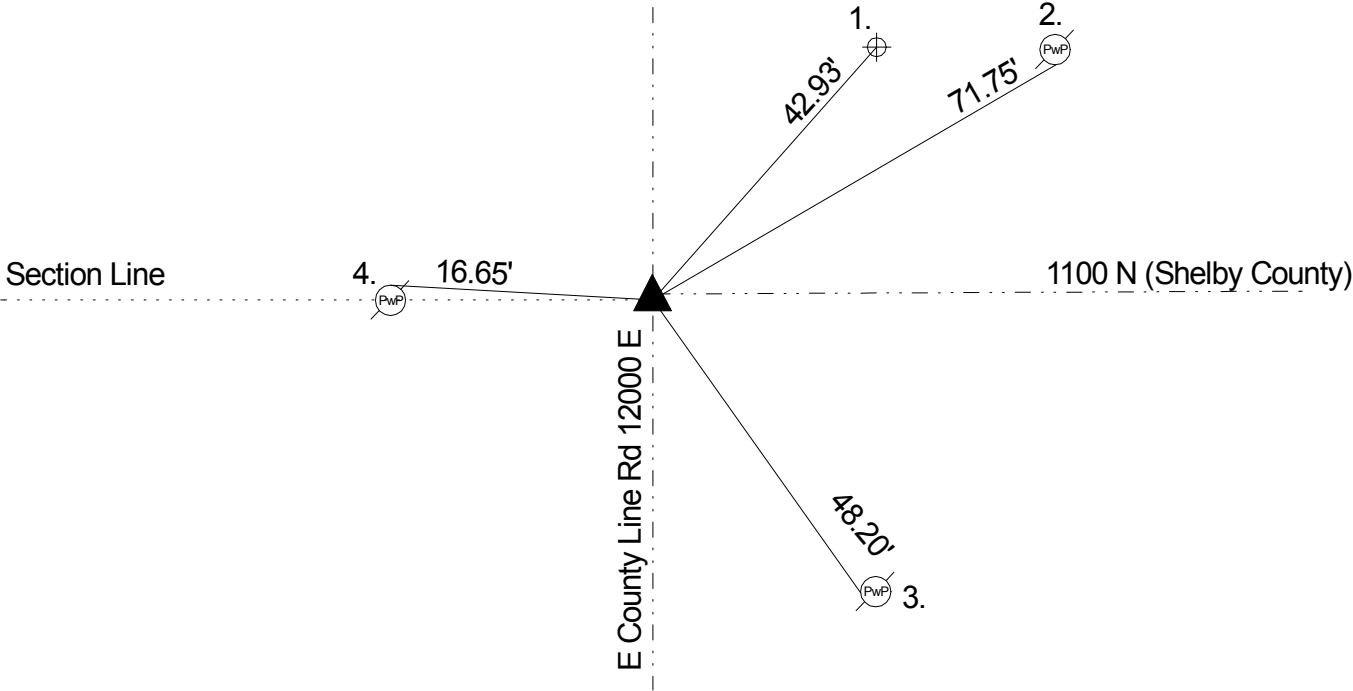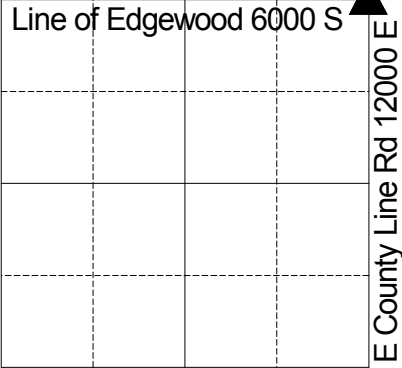

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 20” beech bearing S 56 E 10 and a 12” dogwood bearing N 3 E 18. (M.C. Atlas p. 13) A survey by D. B. Hasbrook on September 14, 1853 indicates no stone or witnesses. (Franklin Legal Book p. 29) Corner referenced by McLand on 4/20/72 and called a r. r. spike 2” down. Corner referenced by Jacobs on 8/1/87 and called a r. r. spike 2” down. Corner referenced by Wilcoxen on 9/20/90 and called a r. r. spike. Corner referenced by Kiste on 1/13/95 and called a r. r. spike. Corner referenced by Wilcoxen on 4/26/00 and called a mag nail. Corner referenced by Wilcoxen on 1/6/05 and called a mag nail. Corner referenced by Greene on 4/18/09 and called a mag nail.

REF.	DISTANCE	DESCRIPTION
1.	42.93'	Center of USC & GS Benchmark #1947 L-238
2.	71.75'	Mag nail w/bw REMC S PwP #43291 28" up
3.	48.20'	Mag nail w/bw REMC W PwP #43292 12" up
4.	16.65'	Road nail N PwP #18-741FA